


SF-1000EL

Standard Duty Grip Top

.75" Pitch

Direct Replacement for:
Uni Light Rubber Top


*Non-headed Rods

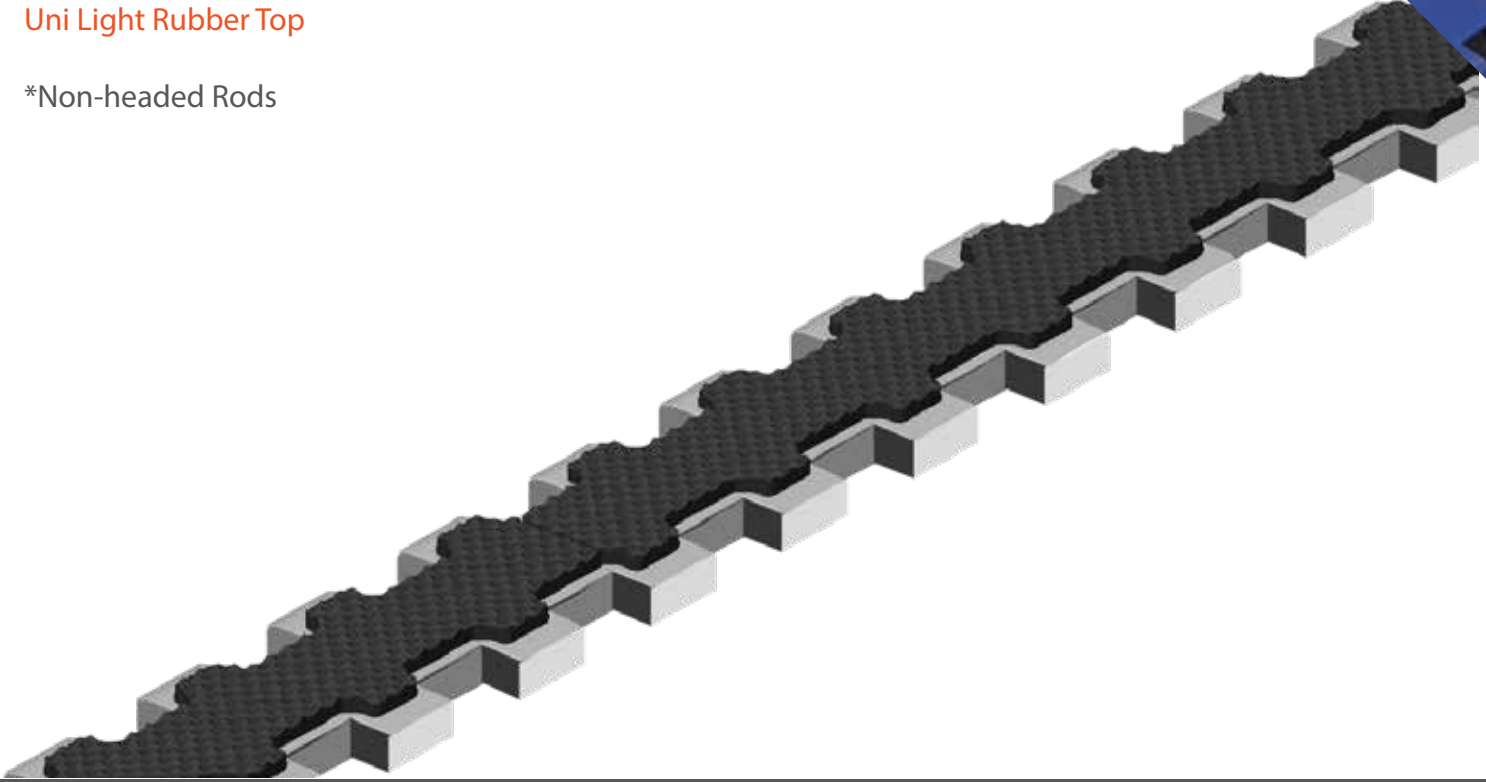

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
.75"	.41"	6"	.236"	0%	Yes	No
19mm	10.4mm	152mm	6mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft ²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PP	953	-	33°	150°	.96	W, G, B

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

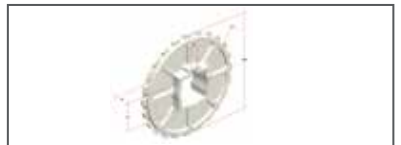

# of Teeth	PD	Bore Size
7	1.67"	1"R
10	2.40"	1"R
17	4.07"	1"R, 1.5"S
24	5.73"	1"R, 1.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- .72"
Flight Standard Indent	+/- 1.5"



SAFARI Belting Systems, Inc.
Conveying Innovation to Industry