


SF-1200B

Standard Duty Flush Grid

.5" Pitch

Replaces:
Habasit M1230

*Headed Rods

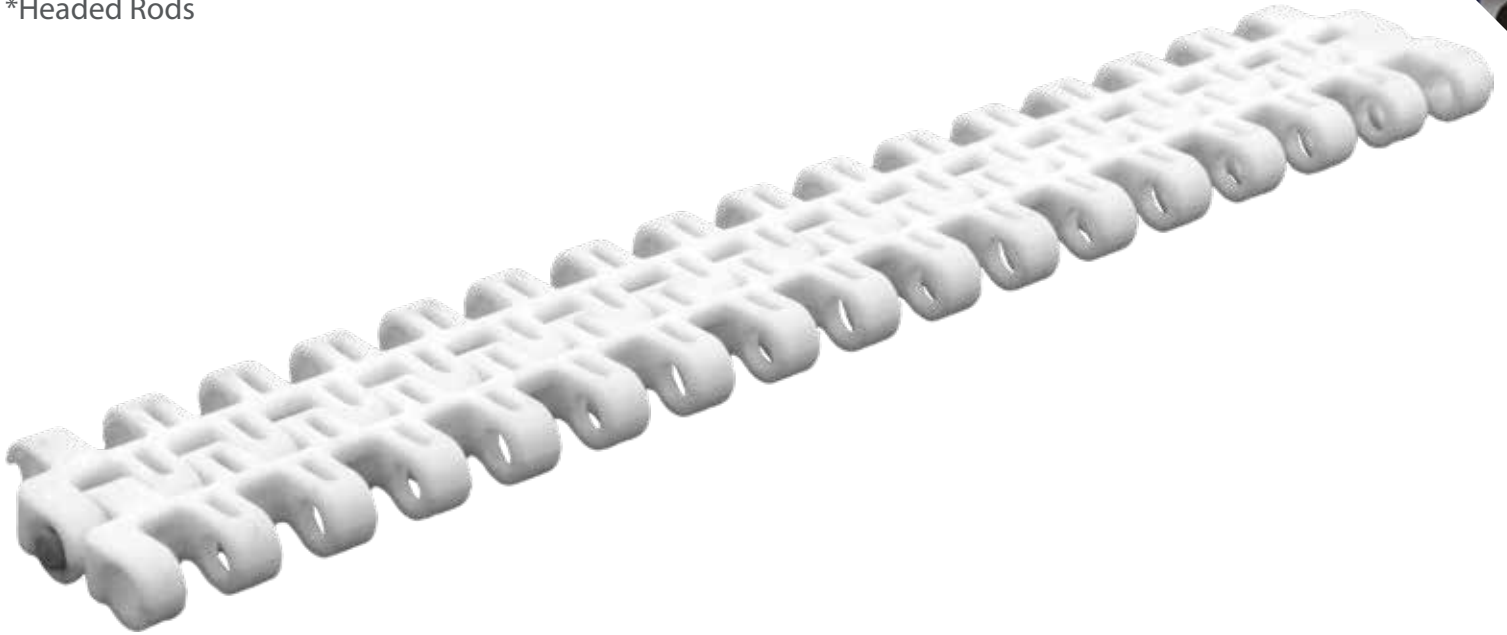

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
.5"	.334"	6"	.179"	19%	No	No
12.7mm	8.5mm	152mm	4.5mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft ²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PA	685	-	33°	230°	.82	W, G, B
PE	POM	578	-	-76°	140°	.88	N, B
Acetal	POM	1108	-	-40°	180°	1.41	W, B
Nylon	PA	1021	-	33°	356°	1.19	BR

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN



# of Teeth	PD	Bore Size
10	1.61"	1"R
19	3.07"	1"R, 1.5"S
24	3.96"	1"R, 1.5"S
28	4.53"	1"R, 1.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- 1"
Flight Standard Indent	N/A



SAFARI Belting Systems, Inc.
Conveying Innovation to Industry