

LFS-880TAB-EL

Side Flexing Plastic Chain

Plate Materials: POM-LF


Pin Material: Stainless Steel

Dry Temp Range: -50°F to 200°F

Wet Temp Range: -45°F to 185°F

DIMENSIONS	INCH	MM
P	1.5	38.1
E	.280	7.1
T	.157	4.0
F	.300	7.6
N	2.406	61.1
M	1.689	42.9
D	.079	2.0
L	.394	10.0
H	.787	20.0
S	.453	11.5
U	.630	16.0
GC (Straight)	1.811	46.0
GC (Curve)	1.740	44.2

Sprockets and Idler Wheels Available in a Variety of Tooth Counts and Bore Sizes.

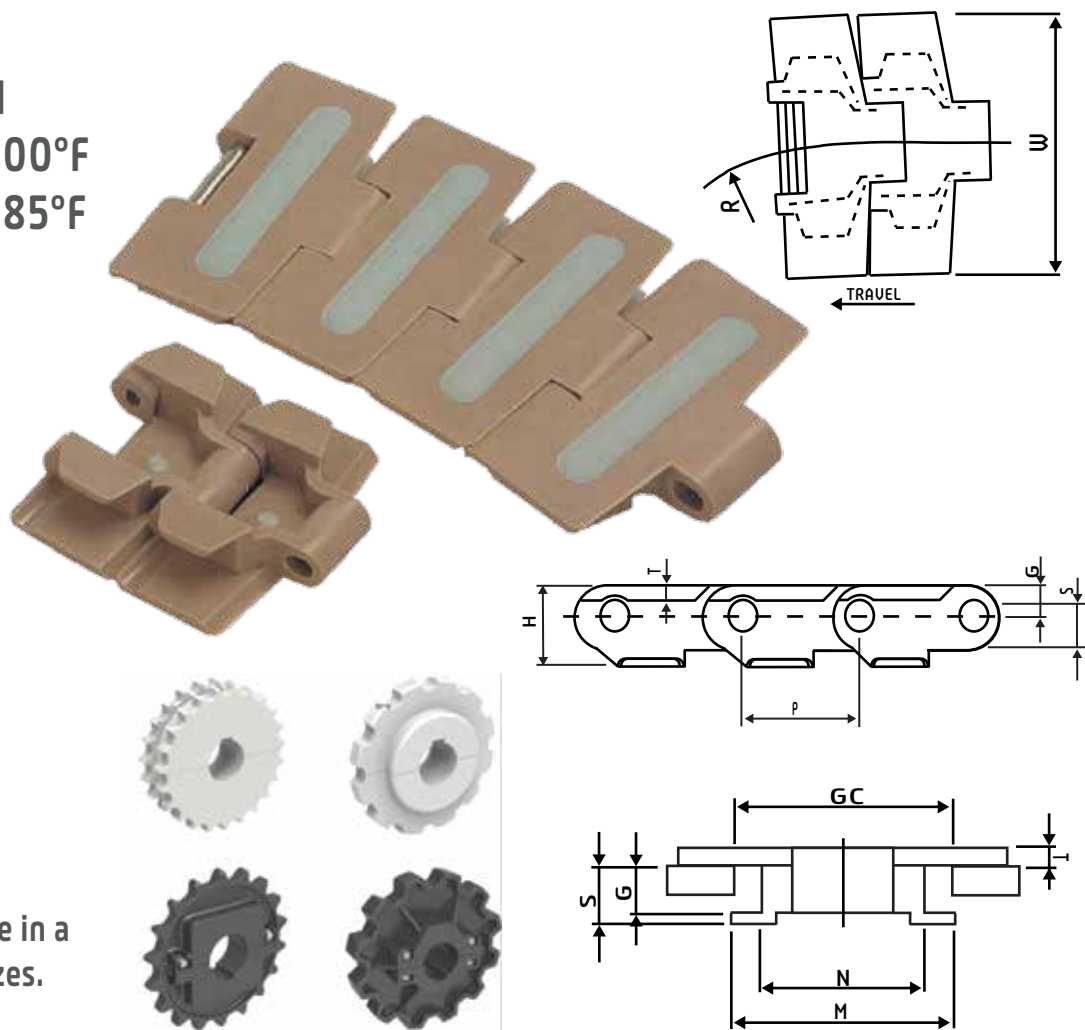

CHARACTERISTICS	WIDTH W		WORKING LOAD		RADIUS		Rev Radius		WEIGHT
	MM	INCH	N(70lbs)	Lbs(70F)	MM	INCH	MM	INCH	lbs/ft
LFS-880TAB K325	82.5	3.25	2100	472	457	18.00	40	1.575	.632
LFS-880TAB K450	114.5	4.50	2100	472	500	19.69	40	1.575	.726

Standard shipping lengths = 80 pitches = 10 ft. = 3.048 M

Conveying Innovation to Industry