

## LFS-882TAB-EL Side Flexing Plastic Chain




Plate Materials: POM-LF

Pin Material: Stainless Steel

Dry Temp Range: -50°F to 200°F

Wet Temp Range: -45°F to 185°F

DIMENSIONS	INCH	MM
P	1.5	38.1
E	.343	8.7
T	.157	4.0
F	.374	9.5
M	2.252	57.2
N	3.0	76.2
D	.079	2.0
L	.433	11.0
H	1.063	27.0
S	.670	17.0
GC (Straight)	2.362	60.0
GC (Curve)	2.283	58.2

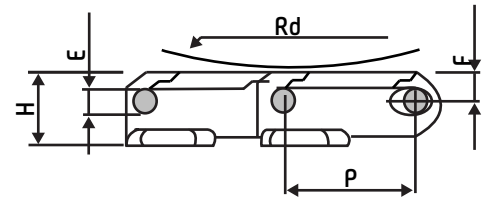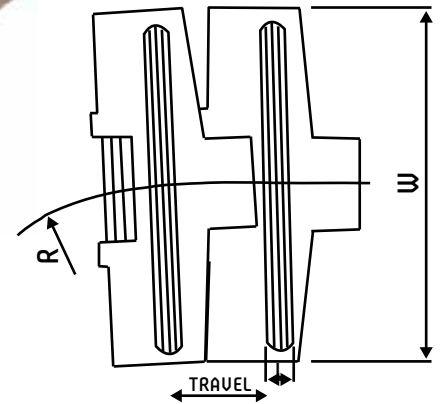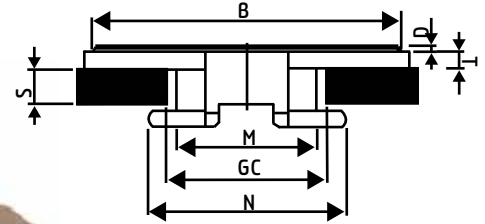

Sprockets and Idler Wheels Available in a Variety of Tooth Counts and Bore Sizes.

CHARACTERISTICS	WIDTH W		WORKING LOAD		RADIUS		Rev Radius		WEIGHT
	MM	INCH	N(70lbs)	Lbs(70F)	MM	INCH	MM	INCH	lbs/ft
LFS-882TAB-EL K750	190.5	7.50	3830	860	609.6	24	40	1.575	1.66
LFS-882TAB-EL K1000	254.0	10.00	3830	860	609.6	24	40	1.575	1.93
LFS-882TAB-EL K1200	304.8	12.00	3830	860	609.6	24	40	1.575	2.29

Standard shipping lengths = 80 pitches = 10 ft. = 3.048 M

**Conveying Innovation to Industry**