


SF-1100C

Standard Duty Roller Top

.6" Pitch

Compare To:
Intralox 1000
Insert Roller


*Non-headed Rods

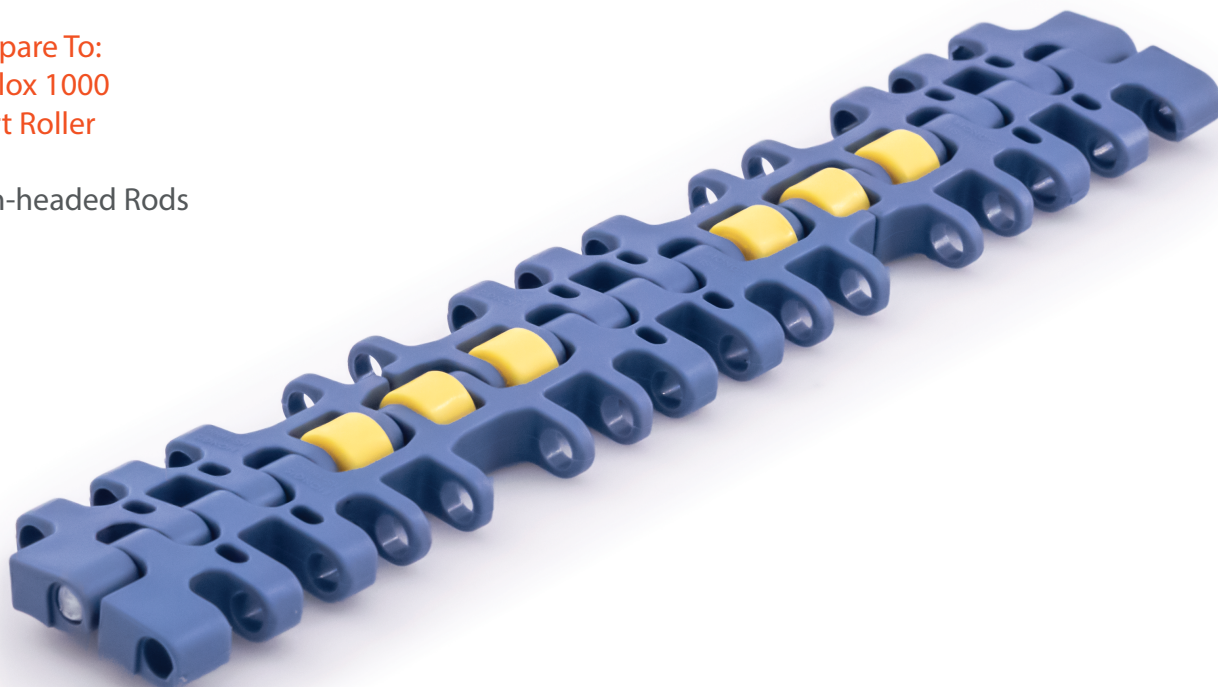

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
.6"	.453"	8.14"	.196"	10%	No	No
15.5mm	11.5mm	207mm	5mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature		Belt Weight	Colors
		Straight Lb/Ft	Curved Lb/Ft	Fahrenheit Min	Fahrenheit Max		
PP	PP	1061	-	33°	230°	1.8	W, G
Acetal	PE	1159	-	-50°	180°	2.41	W, B

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN



# of Teeth	PD	Bore Size
12	1.2"	1"R,
16	3.1"	1"R, 1.5"S
24	4.8"	1.5"S
32	6.2"	1.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- 1"
Flight Standard Indent	+/- 2"



SAFARI Belting Systems, Inc.

Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com