


# SF-1500B-N

## Standard Duty Flush Grid

### .5" Pitch

Direct Replacement for:  
Intralox 1500  
Flush Grid

\*Non-headed Rods

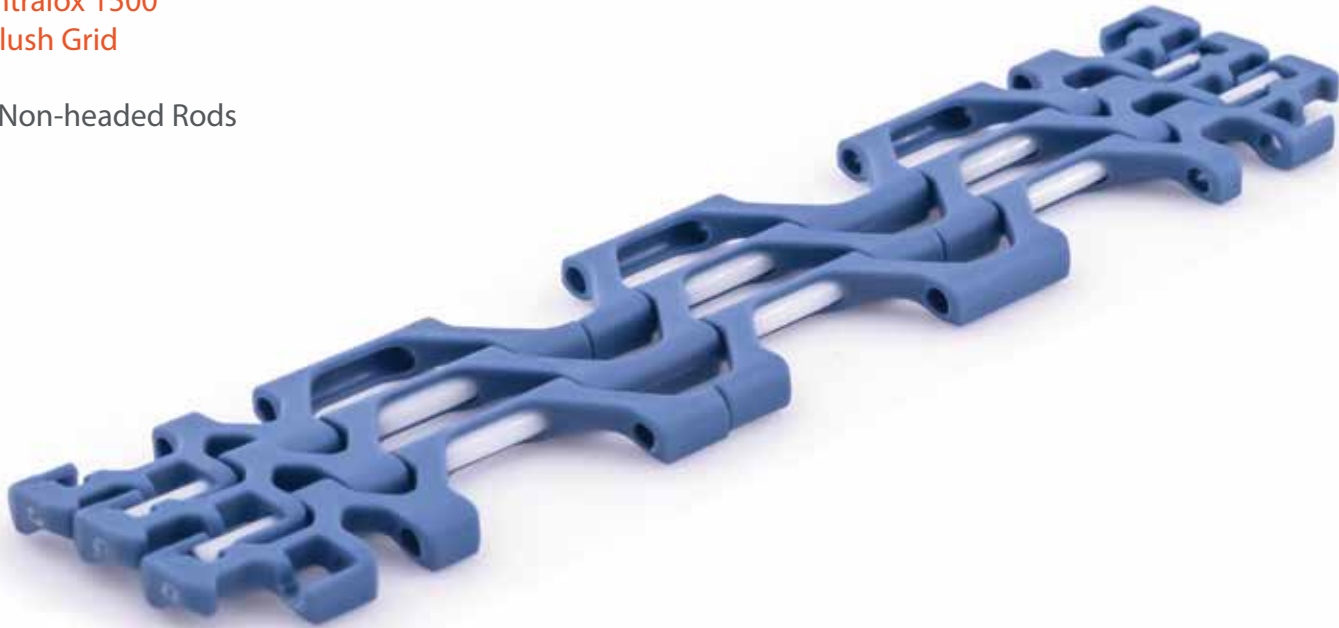

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
.5"	.25"	8"	.14"	53%	Yes	No
12.7mm	6.4mm	208mm	3.6mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft <sup>2</sup>	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PA	685	-	33°	230°	.82	W, G, B
PE	POM	578	-	-76°	140°	.88	N, B
Acetal	POM	1108	-	-40°	180°	1.41	W, B
Nylon	PA	1021	-	33°	356°	1.19	BR
Nylon	SS	1021	-	33°	500°	1.19	BR
ULTIG	ULT	240	-	30°	302°	.51	B, N, W

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

# of Teeth	PD	Bore Size
10	1.8"	.63"R
12	2.0"	1"R, 1"S
14	2.4"	1"S
19	3.2"	1"R, 1.5"S
24	4.0"	1"R, 1.5"S
36	6.0"	1.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- 2"
Flight Standard Indent	+/- 1"



**SAFARI** Belting Systems, Inc.  
Conveying Innovation to Industry