


SF-1700B

Heavy Duty Flush Grid

1.5" Pitch

Replaces:
Intralox S1700
Flush Grid

*Headed Rods

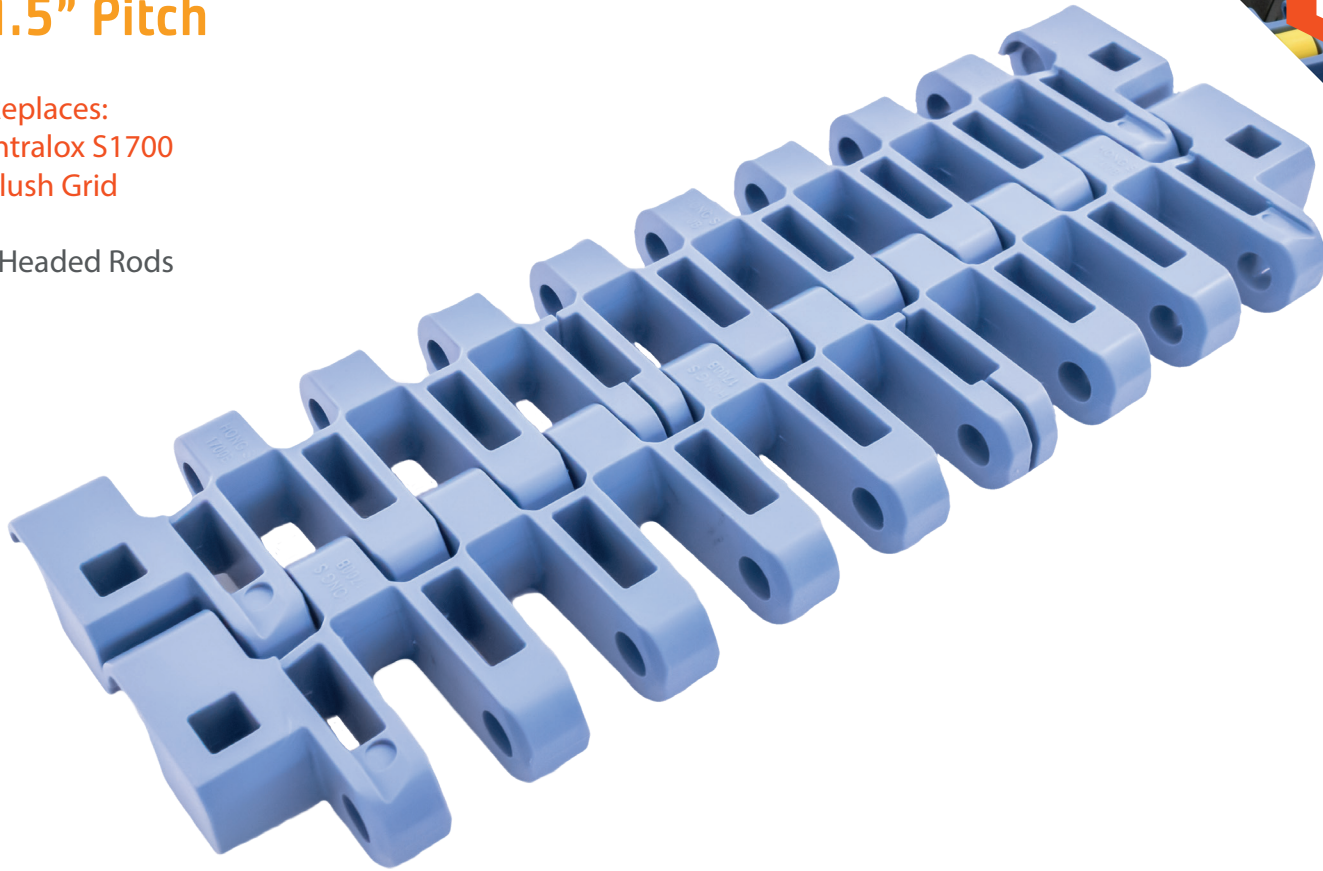

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
1.5"	.75"	9.8"	.315"	37%	Yes	No
38.1mm	18.9mm	250mm	8mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft ²	Colors
		Straight Lb/Ft (BW)	Curved Lb/Ft (BW)	Min	Max		
PP + AS	PA	2016	-	33°	230°	3.07	W, G, B
Acetal	PA	3360	-	-76°	140°	4.36	N, B
Acetal + AS	PA	3360	-	-40°	180°	4.36	N, DB
AS - Anti-Static							

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

# of Teeth	PD	Bore Size
14T-SPLIT	6.7"	1.5", 2.5"S
16T-SPLIT	7.7"	1.5", 2.5"S
22T-SPLIT	10.5"	2.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- 6"
Flight Standard Indent	3"



SAFARI Belting Systems, Inc.
Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com