SF-225ELN

Heavy Duty Grip Top
Paso 2”

Reemplazo Directo Para:
Intralox 800 Serie
Friction Top

*Pernos sin Cabeza

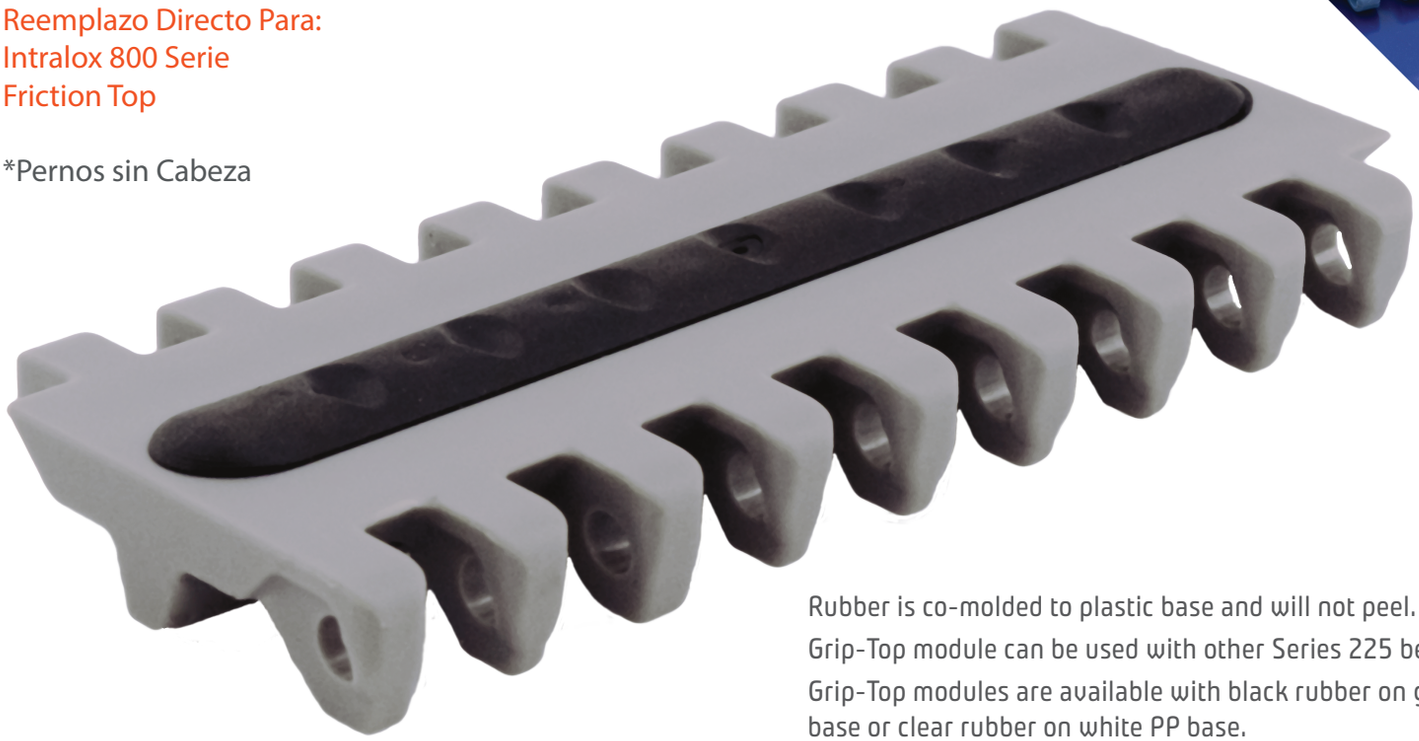

Rubber is co-molded to plastic base and will not peel.

Grip-Top module can be used with other Series 225 belts.

Grip-Top modules are available with black rubber on gray PP base or clear rubber on white PP base.

Grip Top must have at least 2” side indent.

Paso	Espesor	Ancho Mínimo	Perno	Área Abierta	Empujadores	Guardas Laterales
2”	.787”	6”	.24”	0%	Si	No
50.8mm	17.91mm	152.4mm	6.1mm			

Material de la Banda	Material Estándar del Perno	Resistencia de la Banda		Rango de Temperatura Celsius		Peso de la Banda	Colores
		Recta Lb/Ft	Curva Lb/Ft	Min	Max	Lb/Ft²	
PP	PP	900	-	1°	110°	1.77	W, G, B

BW = Ancho de la Banda, W-Blanco, B-Azul, DB-Azul Oscuro, RB-Azul Real, N-Natural, G-Gris, BK-Negro, BR-Café

# de Dientes	Diámetro de Paso	Medida del Barreno
6	3.8”	1”R, 1.5“S
8	5.1”	1”R, 1.5“S
10	6.5”	1.5”, 2.5“S
12	7.7”	1.5”, 2.5“S
16	10.3”	1.5”, 2.5”S

Sprockets especiales disponibles sobre pedido

Alteración estándar de la banda	+/- .65”
Sangría estándar de la Empujadores	+/- 1.5”

SAFARI Belting Systems, Inc.

Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com