


# SF-225ELN

## Heavy Duty Grip Top

### 2" Pitch

Direct Replacement for:  
Intralox 800 Series  
Friction Top

\*Non-Headed Rods

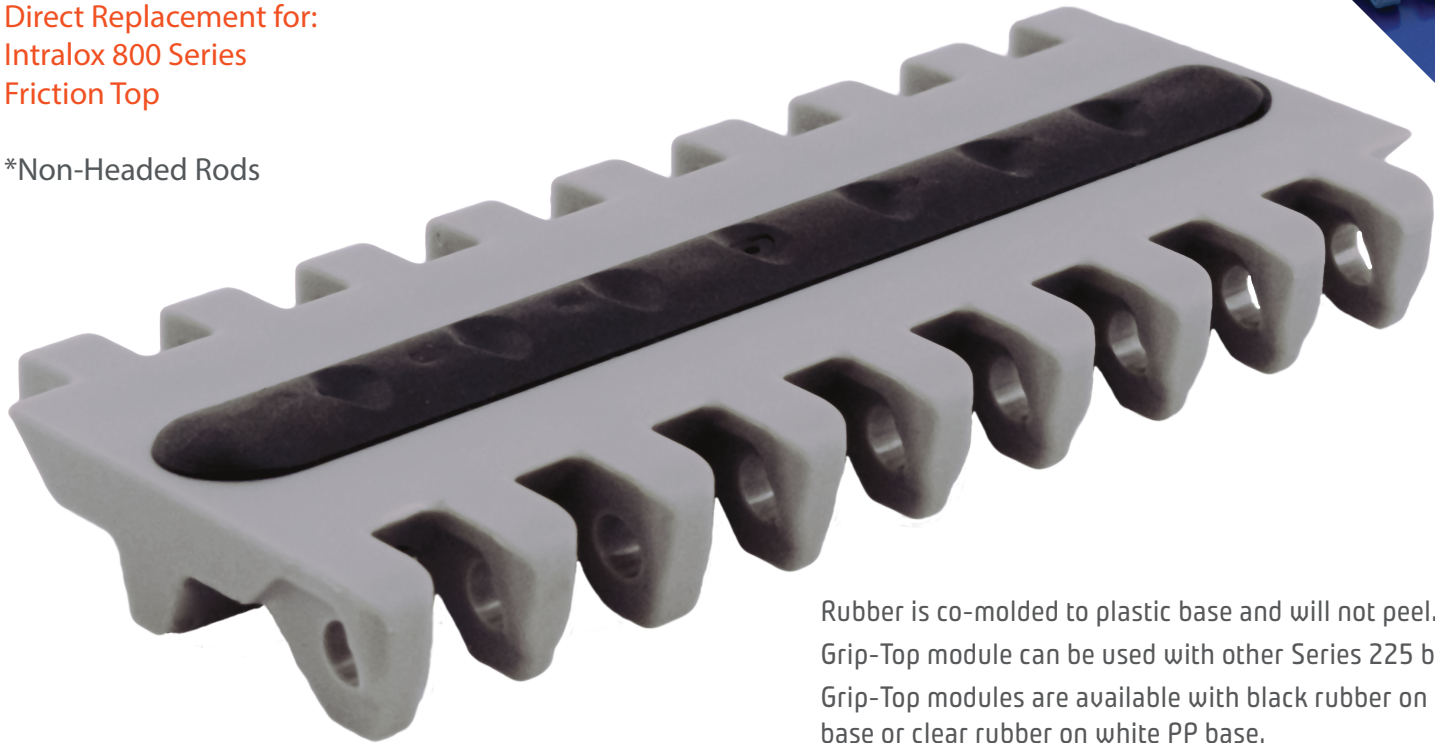


Rubber is co-molded to plastic base and will not peel.  
Grip-Top module can be used with other Series 225 belts.  
Grip-Top modules are available with black rubber on gray PP base or clear rubber on white PP base.  
Grip top must have at least 2" side indent.

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
2"	.705"	6"	.24"	0%	Yes	No
50.8mm	17.91mm	152.4mm	6.1mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft <sup>2</sup>	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PP	900	-	33°	230°	1.77	W, G, B

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

		
# of Teeth	PD	Bore Size
6	3.8"	1"R, 1.5"S
8	5.1"	1"R, 1.5"S
10	6.5"	1.5", 2.5"S
12	7.7"	1.5", 2.5"S
16	10.3"	1.5", 2.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- .65"
Flight Standard Indent	+/- 1.5"



**SAFARI** Belting Systems, Inc.  
Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com