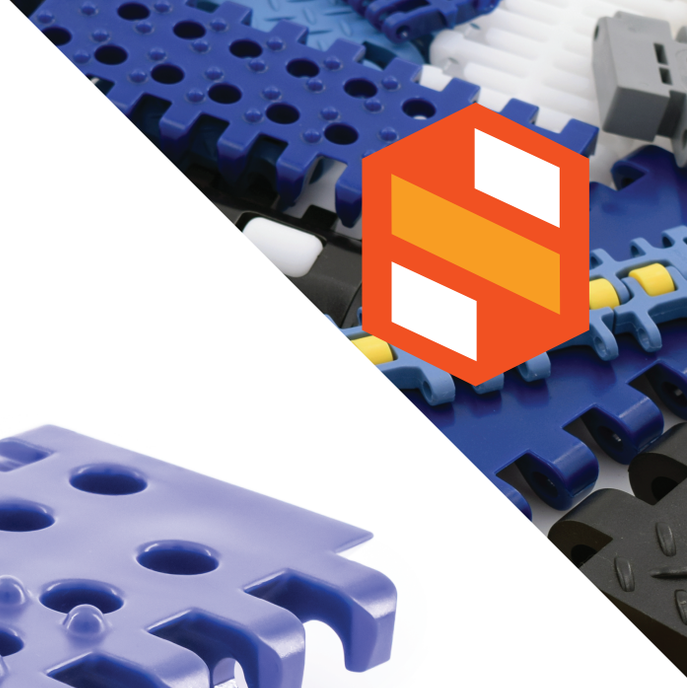

SF-2250DN

Heavy Duty Round Hole Dimple Top
2" Pitch

Direct Replacement for:
Intralox 800 Series
Dimple Top
Round Hole

*Non-headed Rods

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
2"	.725"	4"	.24"	14%	Yes	No
50.8mm	18.4mm	101.6mm	6.1mm			

Belt Material	Standard Rod Material	Belt Strength Straight Lb/Ft	Belt Strength Curved Lb/Ft	Temperature Fahrenheit Min	Temperature Fahrenheit Max	Belt Weight Lb/Ft²	Colors
PP	PP	900	-	33°	230°	1.55	W, G, B
PE	POM	860	-	-50°	150°	1.60	N, B
Acetal	POM	1200	-	-50°	150°	2.40	N, DB
Ultra Tuff™	POM	1188	-	30°	302°	2.37	N, W, DB
Ultra Tuff XMD™	POM	1188	-	30°	302°	2.64	RB

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

# oF Teeth	PD	Bore Size
6	3.8"	1"R, 1.5"S
8	5.1"	1"R, 1.5"S
10	6.5"	1.5", 2.5"S
12	7.7"	1.5", 2.5"S
16	10.3"	1.5", 2.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- .65"
Flight Standard Indent	+/- 1.5"

SAFARI Belting Systems, Inc.

Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com