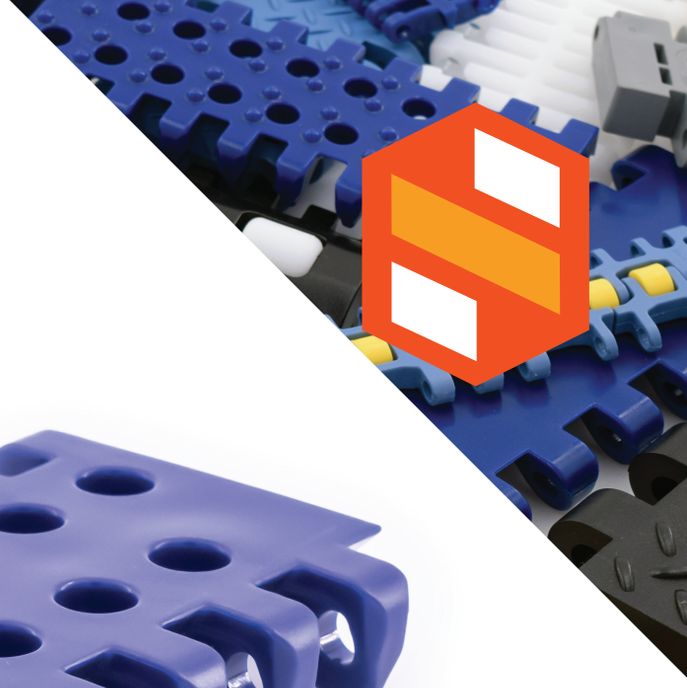

SF-2250N

Heavy Duty 11/32" Round Hole
2" Pitch

Direct Replacement for:
Intralox 800 Series
Round Hole 11/32"

*Non-headed Rods

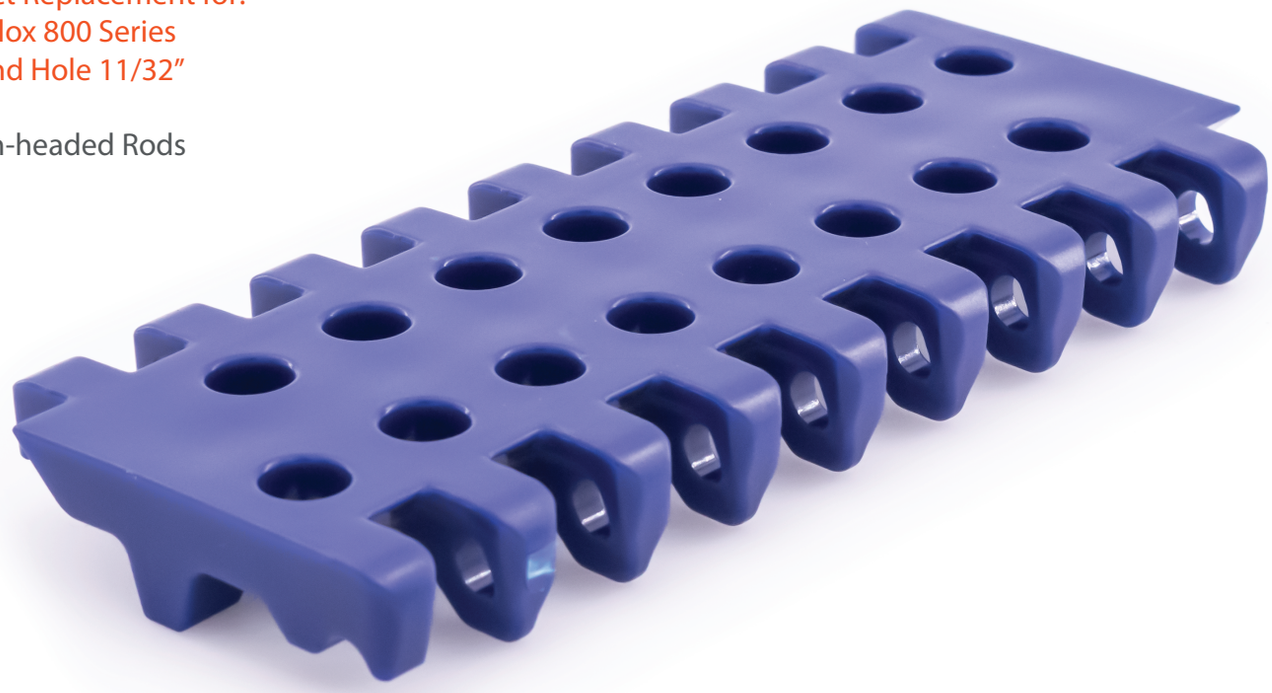

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
2"	.625	4"	.265"	14%	Yes	No
50.8mm	15.9mm	101.6mm	6.5mm			

Belt Material	Standard Rod Material	Belt Strength Straight Lb/Ft	Belt Strength Curved Lb/Ft	Temperature Fahrenheit Min	Temperature Fahrenheit Max	Belt Weight Lb/Ft²	Colors
Ultra Tuff™	PE	1188	-	30°	302°	2.37	N, W, DB
Ultra Tuff XMD™	PE	1188	-	30°	302°	2.5	RB

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

# oF Teeth	PD	Bore Size
6	4"	1" R
8	5.2"	1" R
10	6.5"	1.5" S
12	7.7"	1.5" S
16	10.3"	1.5" S

Special Order Sprockets Available

Belt Standard Alterations	+/- .65"
Flight Standard Indent	+/- 1.5"

SAFARI Belting Systems, Inc.

Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com