


SF-502AHD

Standard Duty Flat Top

1" Pitch

Direct Replacement for:
Uni QNB

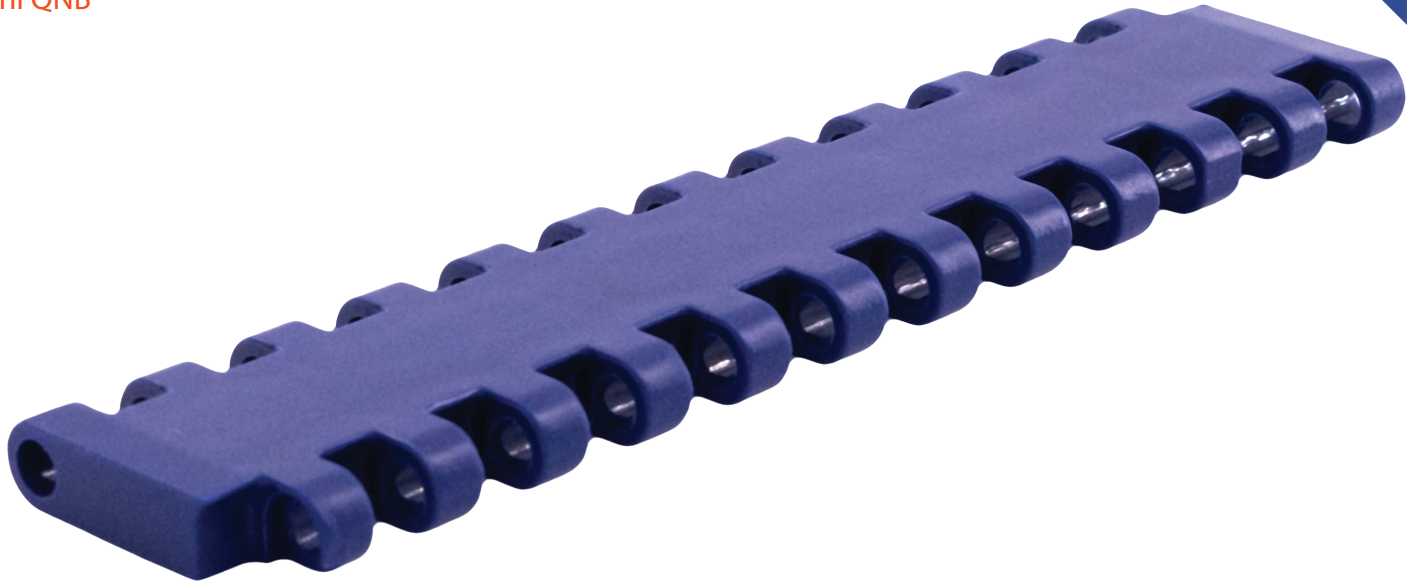

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
1"	.346"	6"	.19"	0%	Yes	No
25.4mm	8.8mm	150mm	4.9mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft ²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PP	1344	-	33°	230°	1.10	W, G
Acetal	PA	2352	-	-50°	150°	1.70	W, B

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

# of Teeth	PD	Bore Size
12	3.8"	1"R, 1.5"S
12-split	3.8"	1.5"S
15	4.8"	1.5", 2.5"S
15-split	4.8"	1"R, 1.5"S
18	5.8"	1"R, 1.5"S
18-split	5.8"	1.5"S
19-split	6.1"	1.5"S
24-split	7.6"	2.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- 3"
Flight Standard Side Indent	No Side Indent



SAFARI Belting Systems, Inc.
Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com