


SF-1000A

Standard Duty Flat Top

.75" Pitch

Direct Replacement for:
Uni Light C


*Non-headed Rods

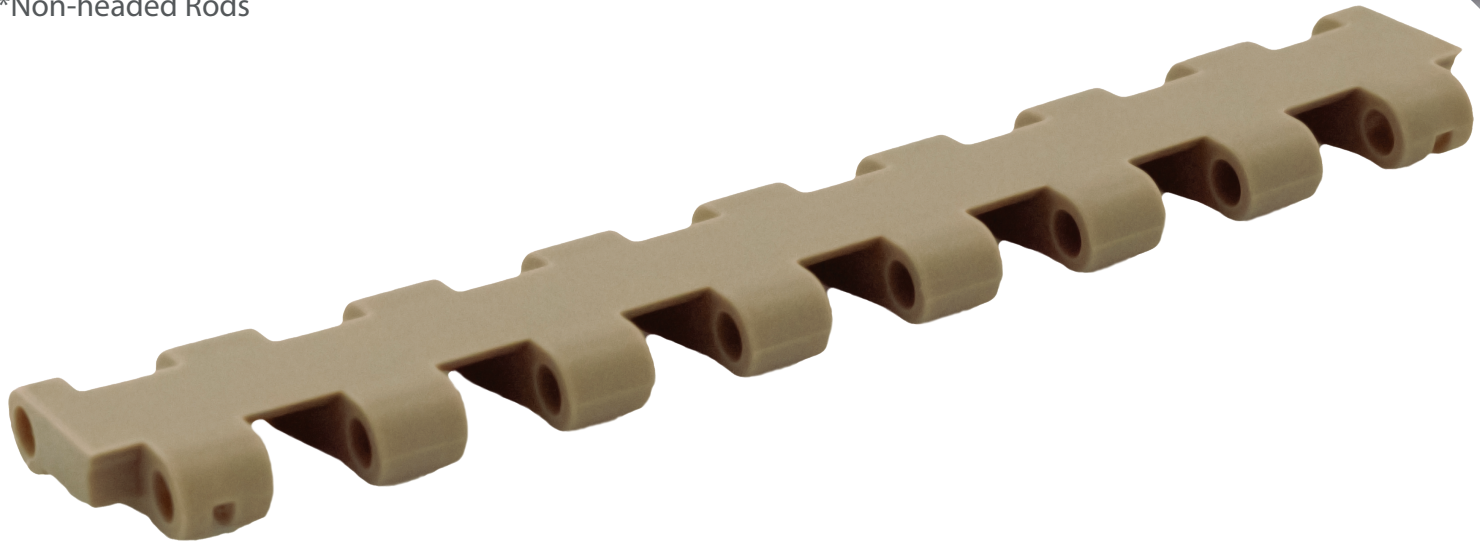

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
.75"	.334"	6"	.236"	0%	Yes	No
19mm	8.5mm	152mm	6mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PP	953	-	33°	230°	.96	W, G, B
PE	PE	812	-	-76°	140°	1	N, B
Acetal	PE	1360	-	-40°	180°	1.33	W, B
Nylon	PE	1007	-	33°	356°	1.02	BR

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

		
# of Teeth	PD	Bore Size
7	1.67"	1"R
10	2.40"	1"R
17	4.07"	1"R, 1.5"S
24	5.73"	1"R, 1.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- .72"
Flight Standard Indent	+/- 1.5"



SAFARI Belting Systems, Inc.

Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com