


SF-3000B

Standard Duty Flush Grid

1" Pitch


Direct Replacement for:
Uni SNB M2 34%

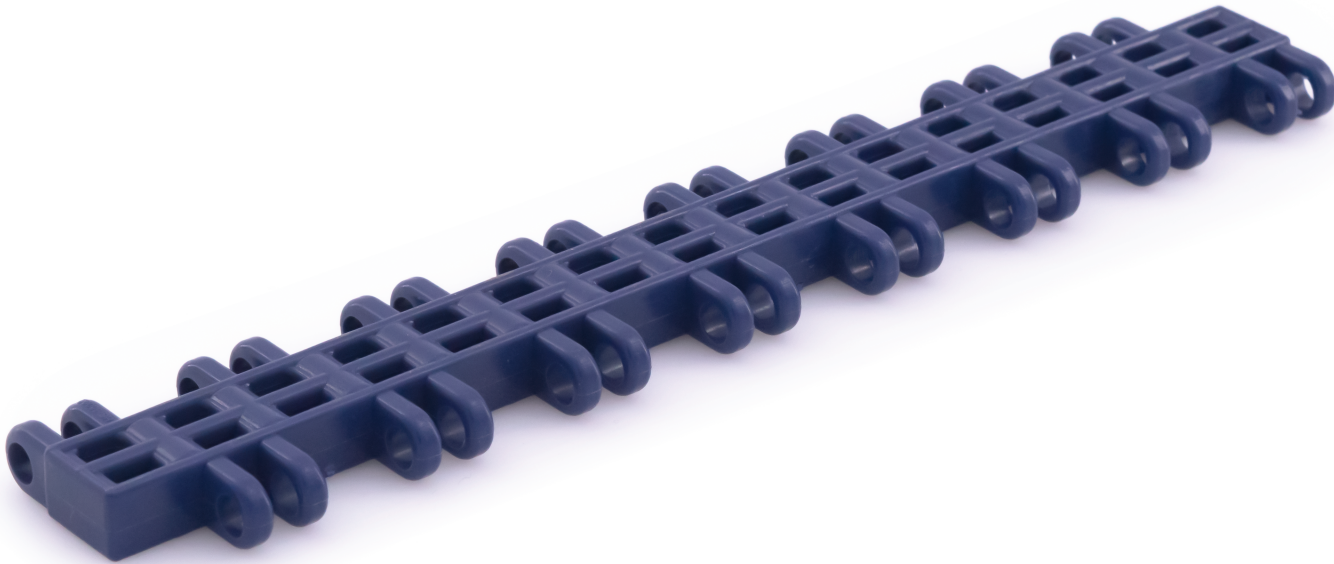

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
1"	.386"	4"	.2"	25%	No	No
25mm	9.8mm	100mm	5mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft ²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PP	679	-	33°	230°	1.05	W, G, B
PE	POM	402	-	-76°	140°	1.12	N, B
Acetal	POM	1035	-	-50°	150°	1.58	W, DB

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

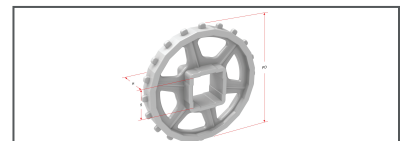

# of Teeth	PD	Bore Size
20	6.3"	1.5"

Special Order Sprockets Available

Belt Standard Alterations	+/- 1"
Flight Standard Indent	N/A



SAFARI Belting Systems, Inc.
Conveying Innovation to Industry