


SF-700D-N

Standard Duty Raised Rib

1" Pitch

Direct Replacement for:
Intralox 900
Raised Rib

*Headed Rods

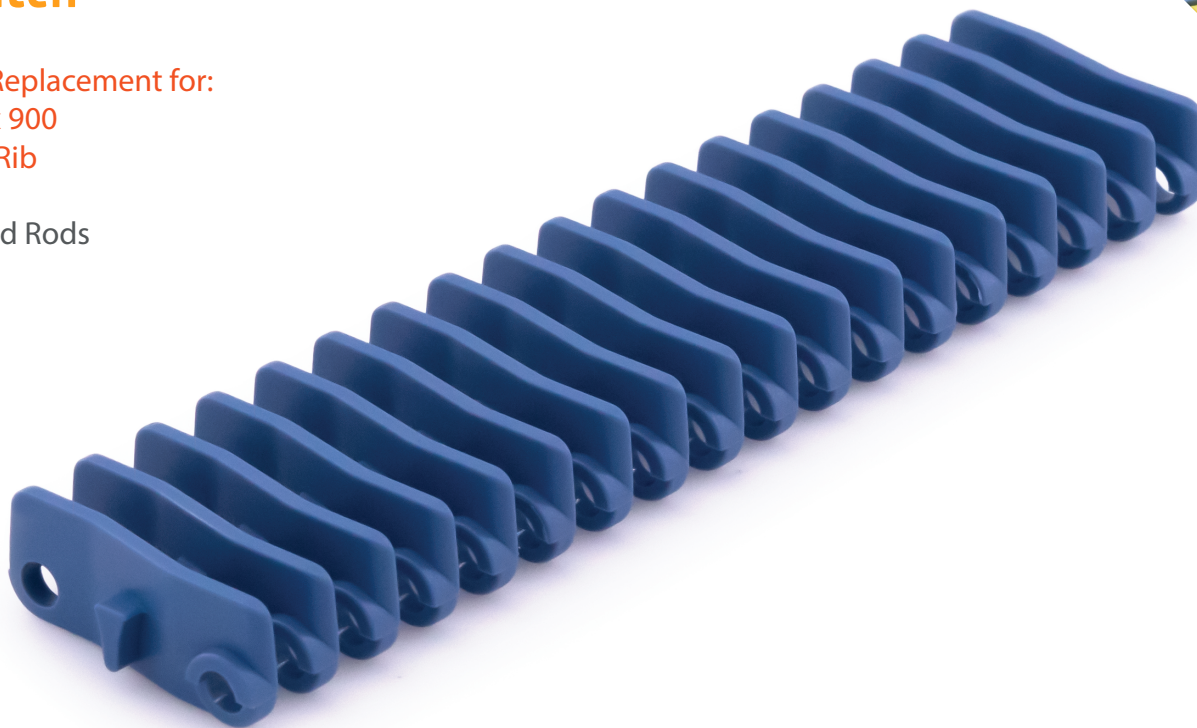

| Pitch | Thickness | Min Width | Rod | Open Area | Flights | Side Guards |
|--------|-----------|-----------|-------|-----------|---------|-------------|
| 1.07" | .563" | 2" | .18" | 38% | Yes | Yes |
| 27.2mm | 14.3mm | 51mm | 4.6mm | | | |

| Belt Material | Standard Rod Material | Belt Strength | | Temperature Fahrenheit | | Belt Weight Lb/Ft ² | Colors |
|---------------|-----------------------|----------------|--------------|------------------------|------|--------------------------------|---------|
| | | Straight Lb/Ft | Curved Lb/Ft | Min | Max | | |
| PP | PP | 710 | - | 33° | 230° | 1 | W, G, B |
| PE | POM | 360 | - | -76° | 140° | 1.17 | N, B |
| Acetel | POM | 1010 | - | -50° | 150° | 1.67 | W, B |
| Nylon | PA | 1215 | - | 33° | 356° | 1.59 | BR |

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

| # of Teeth | PD | Bore Size |
|------------|------|-------------|
| 6 | 2.1" | 1"R, 1"S |
| 9 | 3.1" | 1"R, 1.5"S |
| 10 | 8.2" | 1"R, 1.5"S |
| 12 | 4.1" | 1"R, 1.5"S |
| 18 | 6.1" | 1.5", 2.5"S |
| 20 | 6.8" | 1.5", 2.5"S |
| 20-split | 6.8" | 2.5"S |
| 24 | 8.3" | 1.5"S |

Special Order Sprockets Available

| | |
|---------------------------|----------|
| Belt Standard Alterations | +/- .33" |
| Flight Standard Indent | +/- 2" |



SAFARI Belting Systems, Inc.
Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com