


SF-901C

Heavy Duty Roller Top

2" Pitch

Direct Replacement for:
Intralox 400
Roller Top

*Non-headed Rods

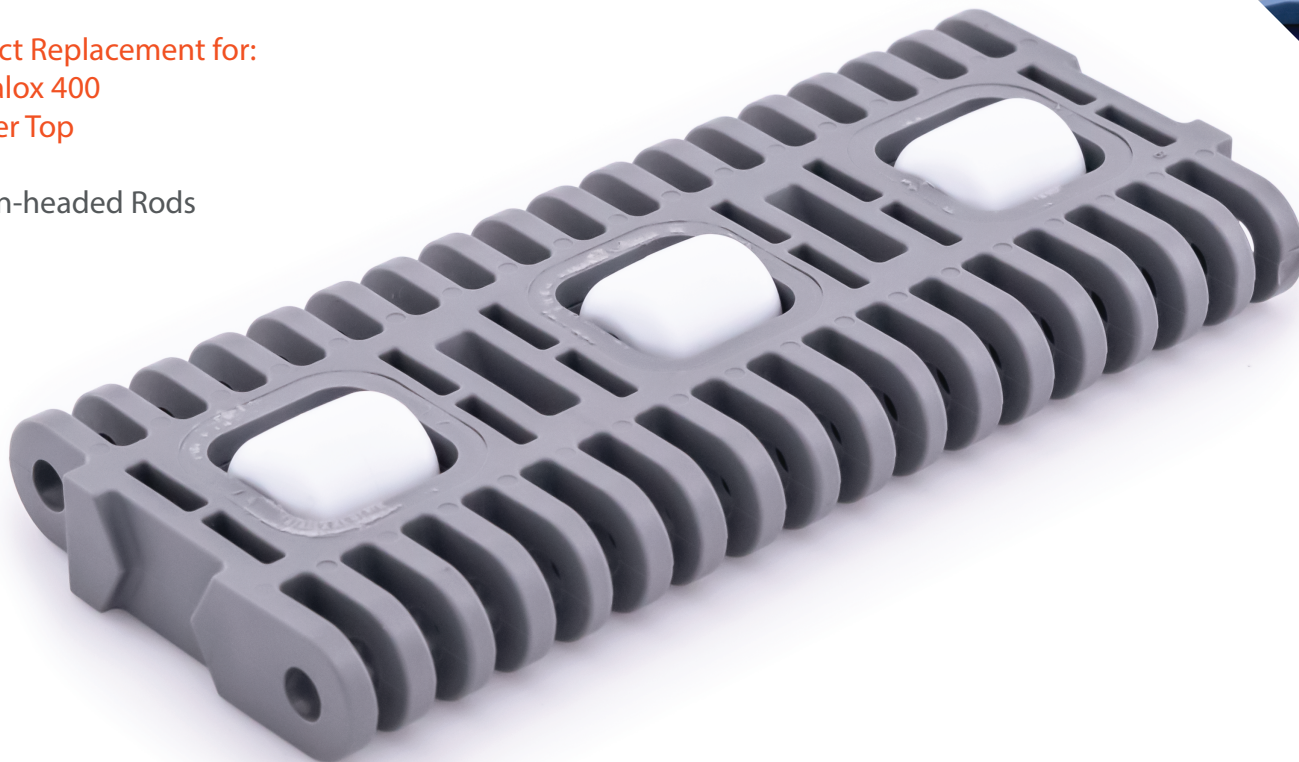

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
2"	.787"	6"	.236"	19%	No	No
50.8mm	20mm	152mm	6mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft ²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PP	2352	-	33°	230°	2.06	W, G, B
PE	PE	1747	-	-76°	140°	2.23	N
Acetal	PE	3199	-	-50°	180°	3.36	W, DB, B

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

# of Teeth	PD	Bore Size
6	3.58"	1.5"S
8-Split	5.08"	1.5"S
10	6.3"	1.5 "S
12	7.72"	1.5", 2.5"S
16	10.2"	2.5"S
17	10.8"	3.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- 2"
Flight Standard Indent	N/A



SAFARI Belting Systems, Inc.

Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com