


# SF-300B-HD-C

Radius, Roller Top

1.77" Pitch

Compare To:  
Intralox 2200  
Roller Top

\*Headed Rods

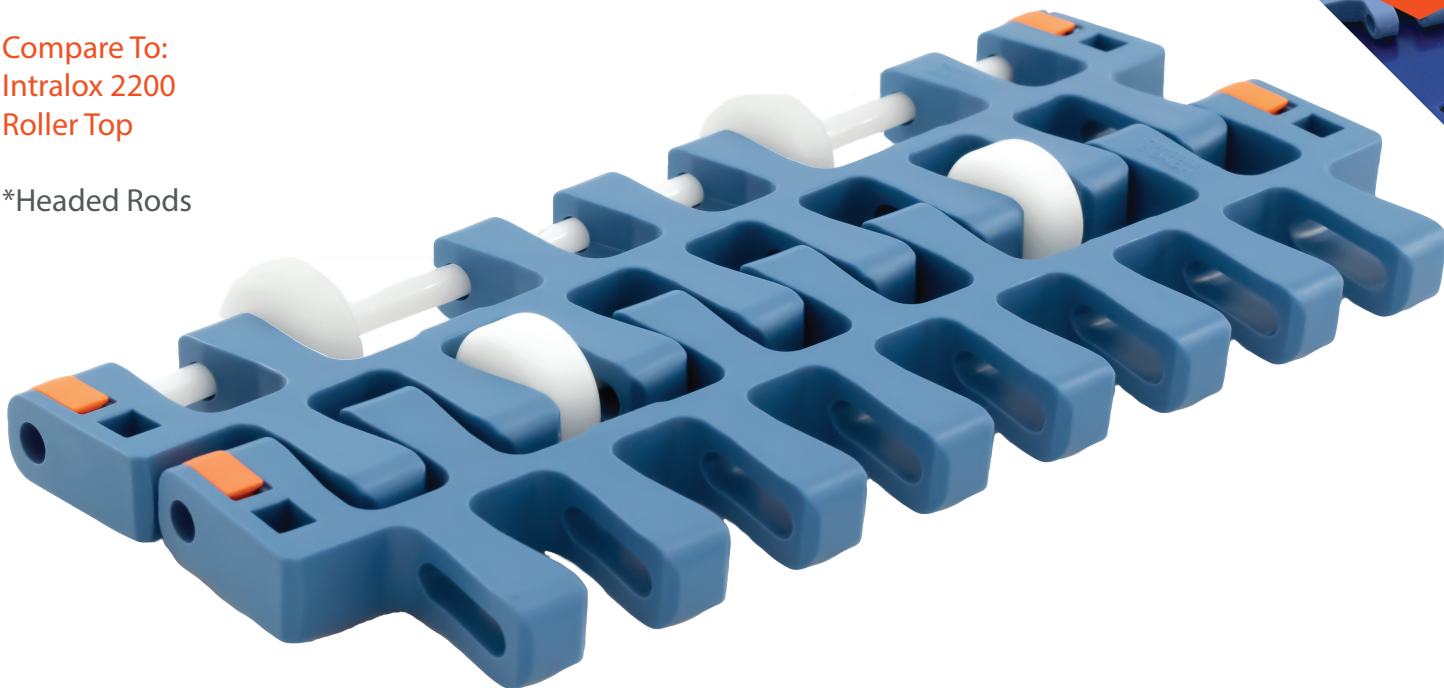

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
1.77"	.59"	8.6"	.23"	38%	No	No
45mm	15mm	218mm	6mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft <sup>2</sup>	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PA	1630	360	33°	230°	1.4	W, G, B
PE	POM	1020	220	-76°	140°	1.48	N
Acetal	PA	2520	370	-50°	150°	2.11	W, B
Nylon	POM	1375	200	33°	356°	1.97	BR

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

# of Teeth	PD	Bore Size
8	4.72"	1.5"
12	7.28"	1.5"

Special Order Sprockets Available

Belt Standard Alterations	+/- .9"
Flight Standard Indent	N/A

**WARNING:** Do not place fingers in or on this belt. Fingers can get trapped in belt openings, resulting in personal injury. This belt has pinch points due to the belt spreading and collapsing as it flexes to follow the conveyor path. Pinch points can trap fingers, hair, or clothing, causing personal injury. Do not wear loose clothing, loose gloves, or hand/finger jewelry when working near this belt. Call Customer Service for tags, flyers, and stickers containing this warning.



**SAFARI** Belting Systems, Inc.

Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com