

SF-2500D

Standard Duty Raised Rib

1" Pitch

Direct Replacement for:
Habasit M2531
Flush Grid


*Headed Rods



Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
1"	.634"	4"	.18"	39%	No	No
25.4mm	16.1mm	101.6mm	5mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft ²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PP	712	-	33°	230°	1.19	W, G, B
PE	POM	692	-	-76°	140°	1.25	N, B
POM	POM	1156	-	-40°	180°	1.80	W, B
Nylon	PA	1021	-	30°	302°	1.62	BR

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN

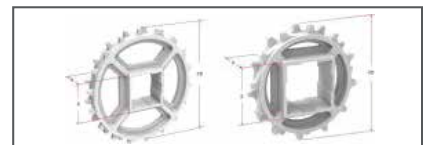

# of Teeth	PD	Bore Size
10-2R	3.25"	40.5mm S
12-2R	3.9"	1.5"S
15-2R	4.9"	1.5"S
18-2R	5.8"	1.5"S
20-2R	6.5"	1.5", 2.5"S
20-2R splt	6.5"	40.5mm S

Special Order Sprockets Available

Belt Standard Alterations	+/- .75"
Flight Standard Indent	N/A



SAFARI Belting Systems, Inc.
Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com