


SF-3200A

Standard Duty Flat Top

.60" Pitch

Direct Replacement for:
Intralox Series 1000
Flat Top

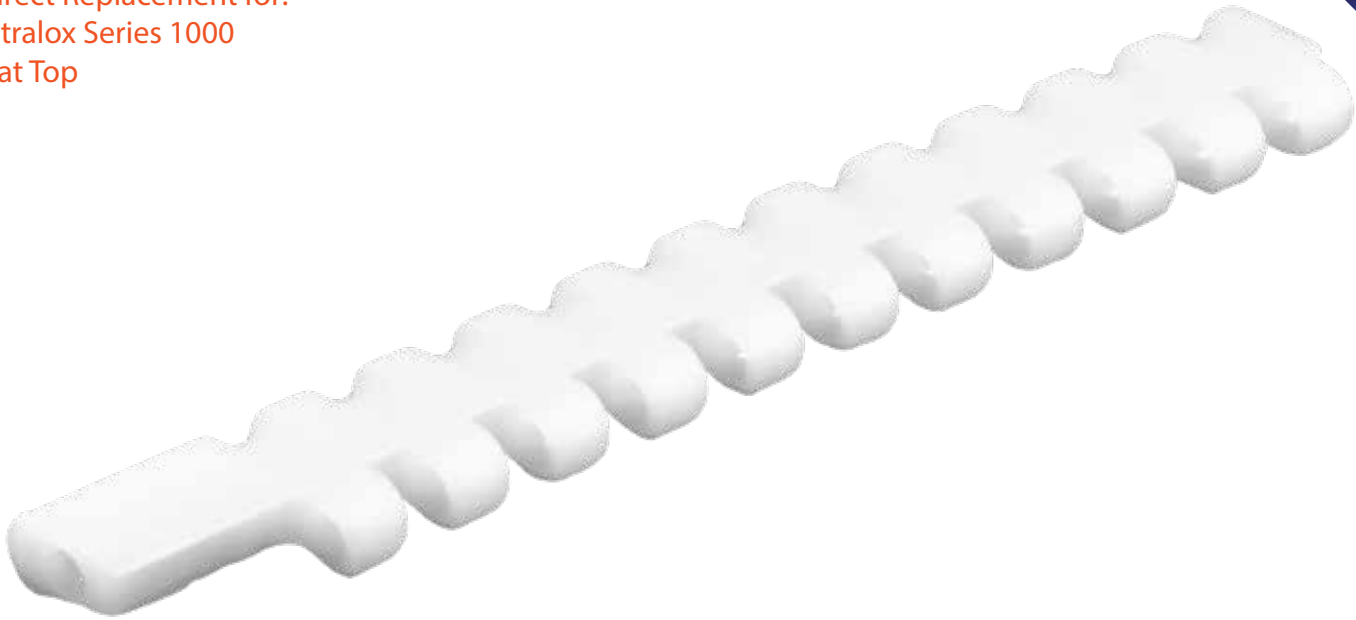

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
.60"	.346"	3"	.18"	0%	No	No
15.2mm	8.8mm	76mm	4.5mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft ²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PP	900	-	33°	230°	1.06	W, G
PE	POM	860	-	-76°	140°	1.11	N
Acetal	POM	1189	-	-50°	150°	1.55	W, DB
Nylon	PA	1021	-	33°	356°	1.32	BR

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN



# of Teeth	PD	Bore Size
16	3.2"	1"R, 1.5"S
24	4.56"	1.5"S
32	6.1"	1"R, 1.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- .5"
Flight Standard Indent	N/A



SAFARI Belting Systems, Inc.
Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com