


SF-225TD

Heavy Duty Threaded Cone Top


2" Pitch

Direct Replacement for:
Intralox 800 Series
Open Hinge Threaded Cone Top

*Headed or Non-headed Rods

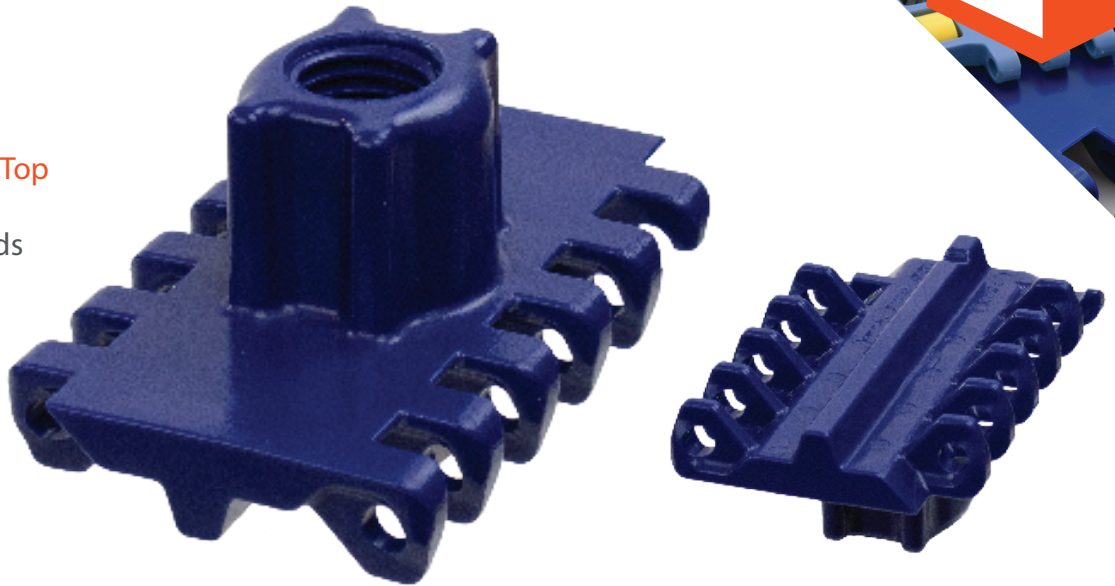

Cling-Free Flights
Up to 4" Tall



Straight Flights
Up to 6" Tall



Scoop Flights
3", 4", and 6" Tall



Bucket Flights
3", 4", and 6" Tall

Pitch	Thickness	Width	Rod	Open Area	Flights	Side Guards
2"	.625"	4"	.24"	0%	Yes	No
50.8mm	15.9mm	101.6mm	6.1mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft ²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PP	900	-	33°	230°	1.77	W, G, B
PE	PE	860	-	-76°	140°	1.87	N, B
Acetal	PE	1200	-	-50°	150°	2.60	N, DB
ULTRA-TUFF™	POM	1186	-	30°	302°	2.57	N, W, DB
ULTRA-TUFF XMD™	POM	1186	-	30°	302°	2.62	RB

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN



# of Teeth	PD	Bore Size
6	3.8"	1"R, 1.5"S
8	5.1"	1"R, 1.5"S
10	6.5"	1.5", 2.5"S
12	7.7"	1.5", 2.5"S
16	10.3"	1.5", 2.5"S

Special Order Sprockets Available

Belt Standard Alterations	+/- .65"
Flight Standard Indent	+/- 1.5"



SAFARI Belting Systems, Inc.
Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com