


SF-6990A

Standard Duty Flat Top

2.25" Pitch

Direct Replacement for:
Rexnord 6995

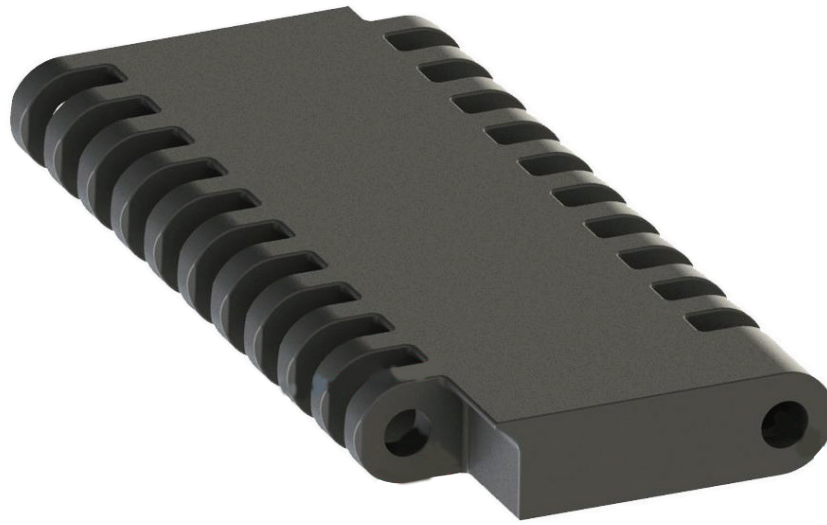

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
2.25"	.717"	7.87"	.31"	0%	Pushers	No
57.15mm	18.2mm	200mm	8mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft ²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
Acetal	POM	11,243	-	-40°	176°	3.23	B, G, W
Acetal + AS	POM	11,243	-	-40°	185°	3.23	B, G, W
ULT	ULT	11,243	-	30°	302°	3.23	BK, R

BW = Belt Width, W-WHITE, B-BLUE, DB-DARK BLUE, RB-ROYAL BLUE, N-NATURAL, G-GRAY, BK-BLACK, BR-BROWN, R-RED, Y-YELLOW

# of Teeth	PD	Bore Size
10	7.29	2.5" S

Special Order Sprockets Available

Belt Standard Alterations	+/- 3"
Flight Standard Side Indent	N/A



SAFARI Belting Systems, Inc.
Conveying Innovation to Industry

220 N Mahaffie Street, Olathe, KS 66061, USA | 913-254-7582 | info@safaribelting.com | SafariBelting.com