





SF-225ODN

11/32" Round Hole Dimple Top 2" Pitch

Category 1 Replacement for:
Intralox 800 Series


*Non-Headed Rods

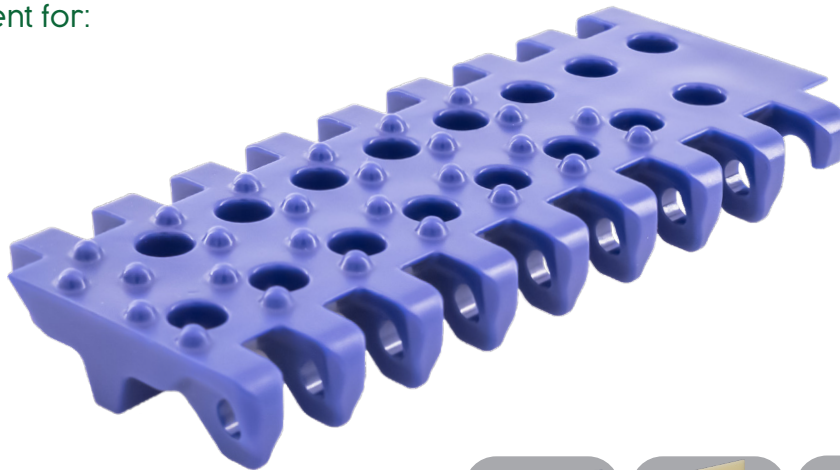

Cling-Free Flights
Up to 4" Tall



Streamline Flights
Up to 6" Tall



Scoop Flights
3", 4" and 6" Tall



Bucket Flights
3", 4" and 6" Tall

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
2"	.725"	4"	.24"	14%	Yes	No
50.8mm	18.4mm	101.6mm	6.1mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
ULTRA-TUFF™	ULT	1188	-	32°	302°	2.37	N, W, DB
ULTRA-TUFF XMD™	ULT	1188	-	32°	302°	2.64	RB

W-White, B-Blue, DB-Dark Blue, RB-Royal Blue, N-Natural, G-Gray, BK-Black, BR-Brown, XMD-XRAY & Metal Detectable



# of Teeth	PD	Bore Size
6	4"	1"R, 1.5"S
8	5.2"	1.5"S
10	6.5"	1.5", 2.5"S
12	7.7"	1.5", 2.5"S
16	10.3"	1.5", 2.5"S

Additional Sprockets Available

Belt Standard Alterations	+/- .65"
Flight Standard Indent	+/- 1.5"



A CHIORINO GROUP COMPANY