




SF-225TD

Threaded Cone Top 2" Pitch

Category 1 Replacement for:
Intralox 800

*Headed or Non-Headed Rods
3/4" Thread
7/8" Deep

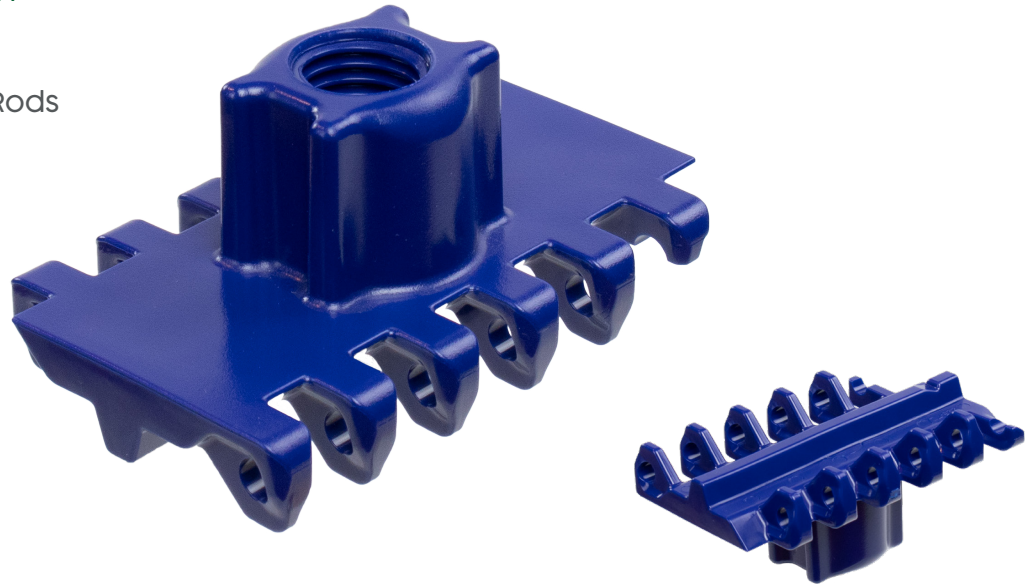

Pitch	Thickness	Min Width	Rod	Open Area	Flights	Side Guards
2"	.625"	4"	.24"	0%	Yes	No
50.8mm	15.9mm	101.6mm	6.1mm			

Belt Material	Standard Rod Material	Belt Strength		Temperature Fahrenheit		Belt Weight Lb/Ft²	Colors
		Straight Lb/Ft	Curved Lb/Ft	Min	Max		
PP	PP	905	-	34°	220°	1.65	W, G, B
PE	PE	505	-	-50°	150°	1.75	N, B
POM	PE	905	-	-50°	150°	2.60	N, DB
ULTRA-TUFF™	ULT	1186	-	32°	302°	2.57	N, W, DB
ULTRA-TUFF MXD™	ULT	1186	-	32°	302°	2.62	RB



# of Teeth	PD	Bore Size
6	3.8"	1"R, 1.5"S
8	5.1"	1"R, 1.5"S
10	6.5"	1.5", 2.5"S
12	7.7"	1.5", 2.5"S
16	10.3"	1.5" 2.5"S

Additional Sprockets Available

Belt Standard Alterations	+/- .65"
Flight Standard Indent	+/- 1.5"

W-White, B-Blue, DB-Dark Blue, RB-Royal Blue, N-Natural, G-Gray, BK-Black, BR-Brown, XMD-XRAY & Metal Detectable



A CHIORINO GROUP COMPANY